STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA	NH000-0575-01(028)		

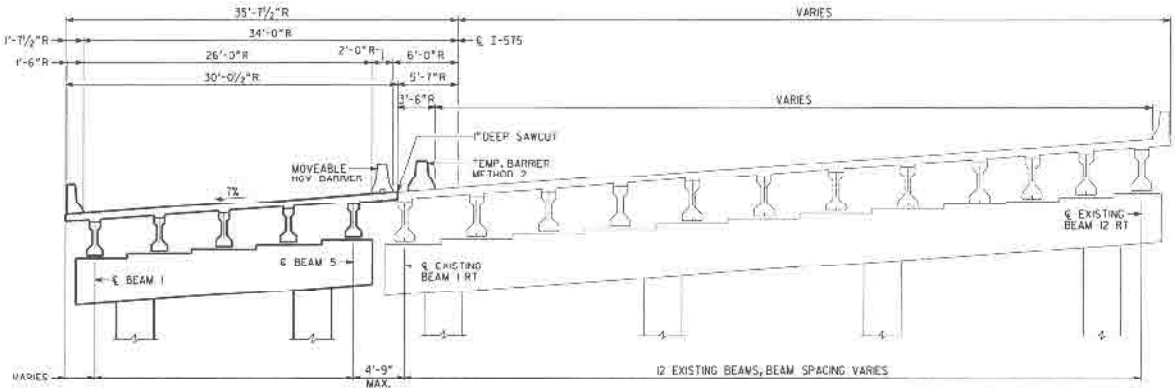

TYPICAL SECTION
(LOOKING AHEAD, RIGHT BRIDGE)

R = RADIAL DIMENSION

CONSTRUCTION SEQUENCE

1. PLACE TEMPORARY BARRIER. MAINTAIN TWO 12'-0" LANES OF TRAFFIC IN EACH DIRECTION ON EXISTING BRIDGES. MAINTAIN EXIT LANE ON EXISTING NB BRIDGE.
2. REMOVE PORTIONS OF EXISTING NORTH BOUND BRIDGE AS NECESSARY FOR NEW CONSTRUCTION.
3. CONSTRUCT NEW SUBSTRUCTURE.
4. CONSTRUCT NEW SUPERSTRUCTURE.

NOTE & IMPORTANT NOTICE! THIS DRAWING IS AN INCOMPLETE WORK-IN-PROGRESS AND ITS USE IS SUBJECT TO NOTE 1 ON DRAWING NO. 1-01.

BRIDGE NO. 40

ADMIN. CONSTRUCTION METHOD	11/20/03	
DRAWN BY	DATE	
CHECKED BY	DATE	
SUPERVISOR	DATE	
APPROVED	DATE	

REVISIONS

NO.	DATE	DESCRIPTION	DWG	CHK	SUPV	APPR
2	11/10/04	PROCESSED FOR ADMIN CONSTRUCTION	ALM	JCB	DLL	[illegible]
3	11/20/03	25% SUBMISSION	ALM	JCB	DLL	[illegible]
1	10/20/03	PLOTTED FOR COSTS, INFORMATION ONLY	ALM			
		CONVENIENCE SHEETING				

Georgia Transportation Partners

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

JBT J.B. Trimble, Inc.
2550 Heritage Ct, SE Suite 250
Atlanta GA 30339-3062
(770) 952-1023

BRIDGE SHEET 2 OF 6

I-75 / I-575 NORTHWEST CORRIDOR

I-575 REVERSIBLE OVER NOONDAY CREEK NORTH

CONSTRUCTION SEQUENCE

CHEROKEE COUNTY NH000-0575-01(028)

DRAWING NO. 35-27